

ELECTRICAL

- STANDARD 230 V 50 / 60 HZ POWER SUPPLY
- LAMP SOCKET R7S
- 2 M POWER SUPPLY CABLE (PLUG AVAILABLE ON REQUEST)
- STRAIN RELIEF CABLE CLAMP


SAFETY

- SAFETY WIRE
- LOCKING FILTER HOLDER


OPTICS

- ALUMINIUM (99,99 %) ASYMMETRICAL REFLECTOR TREATED
- MIRRORED SIDES


DIMENSIONS & WEIGHTS

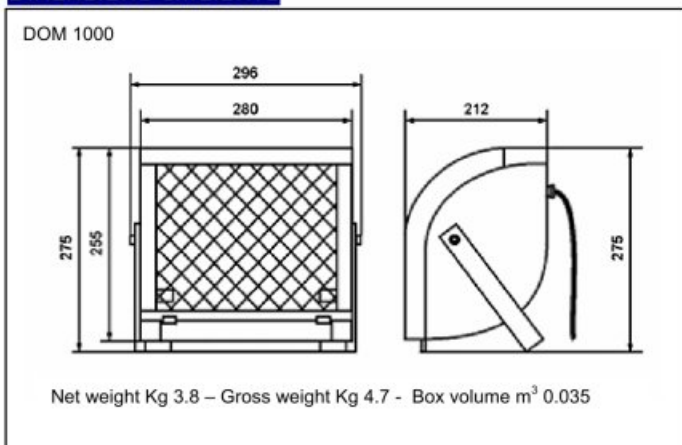

PHOTOMETRIC DATA

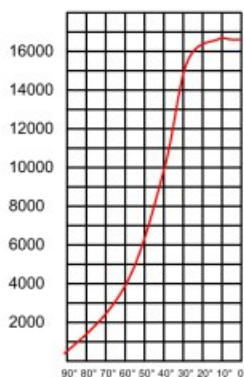

DEGREES FROM CENTRAL AXE

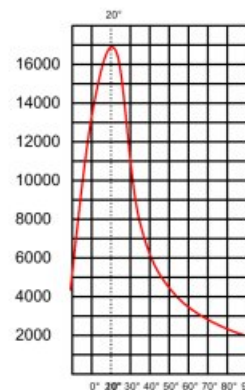

DEGREES FROM VERTICAL AXE

ORDER INFORMATION ACCESSORIES & OPTIONS

ACCESSORIES		
▪ 2x2 FRAME FOR FOUR DOMINO IN A SQUARE , HAND OPERATED		D 2 X 2 M
▪ 2x2 FRAME FOR FOUR DOMINO IN A SQUARE , POLE OPERATED		D 2 X 2 P
▪ 4x1 BAR FOR FOUR DOMINO IN LINE		D 4 X 1

LAMPS

CARACTERISTICS	LONG LIFE 3000 °K	LONG LIFE 3000 °K	FILM/TV 3200 °K	FILM/TV 3200 °K	FILM/TV 3200 °K
TYPE/CODE	K3	K4	P2/10	P2/7	P2/12
POWER (W)	750	1000	625	1000	1250
LENGHT (MM)	189	189	189	189	189
LAMPHOLDER	R7s	R7s	R7s	R7s	R7s
LUMINOUS FLUX (LUMEN)	16900	24200	16900	28000	35000
LIFE TIME (H)	2000	2000	300	300	300
COLOUR TEMPERATURE (°K)	3000	3000	3200	3200	3200
SUPPLY VOLTAGE (V)	230	230	230	230	230
NOMINAL CURRENT (A)	3,2	4,3	2,7	4,3	5,4



SPOTLIGHT RESERVE THE RIGHT TO CHANGE SPECIFICATION WITHOUT PRIOR NOTICE

VIA SARDEGNA 3 - 20098 - SAN GIULIANO MILANESE (MI) TEL. +39 02 98 83 055 - FAX +39 02 98 83 056

E-MAIL: SALES@SPOTLIGHT.IT - WEB: WWW.SPOTLIGHT.IT